

JOB _____ TYPE _____

SERIES

7050 - Banded close to ceiling

DIFFUSER


WH- White Opal Acrylic-(standard)
FA- Faux Alabaster

TRIM RING FINISH

PB- Polished Brass(standard)
PN- Polished Nickel
BB- Brushed Brass
BN- Brushed Nickel
PT- Painted White

BALLAST

H- Magnetic-High Power Factor
N- Magnetic-Normal Power Factor
E- Electronic

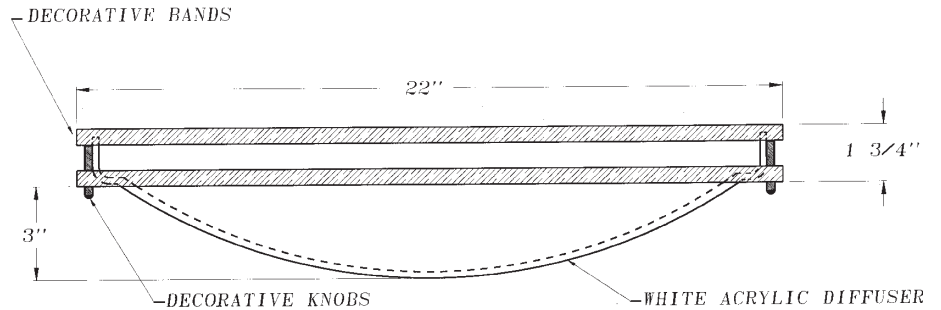

PRODUCT INFORMATION

- Graceful close to ceiling fixture uses spun metal rings to accent diffuser
- Decorative trim finished in a choice of metallics, or selected colors.
- Finish applied over phosphate pre-treated material.
- White opal acrylic or faux alabaster diffuser.
- Magnetic or Electronic Ballast.
- 2 lamps provide ample ambient illumination.
- ADA compliant.
- Manufactured and tested to UL standard No. 1598.



MODEL	#LAMPS	WATTS	BALLAST	VOLTS	DIFFUSER	FINISH
7050	1	13	N- Magnetic Normal Power Factor	1- 120 2- 277	WH- White Opal Acrylic	PB- Polished Brass
	2	26	H- Magnetic High Power Factor		FA- Faux Alabaster	PN- Polished Nickel
		INC	E- Electronic			BB- Brushed Brass
						BN- Brushed Nickel
						PT- Painted White

Example: 7050-213E1-WHPB- 5" Deep 22" diameter close-to-ceiling fixture, polished brass trim ring with white opal acrylic diffuser. 2-13 watt QPL lamps, and 120 volt electronic ballast.

We are constantly updating our designs, and reserve the right to make changes that do not affect the function or appearance of any fixtures.